



EB0040H

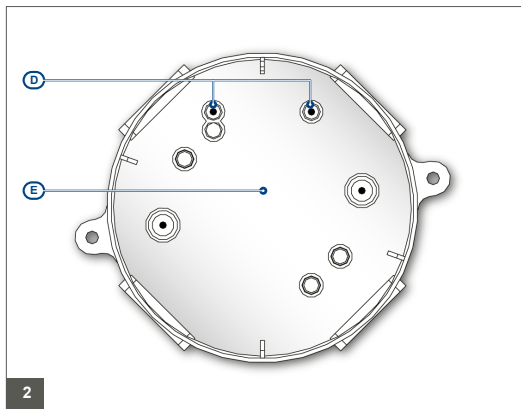

IT Riscaldatore 2W per basi EB0040

EN 2W heater for EB0040 bases

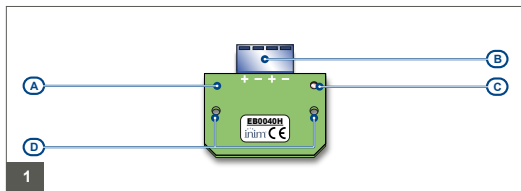

IT

Descrizione

Il riscaldatore EB0040H è un accessorio della base a tenuta stagna EB0040 per rivelatori della serie Iris e Enea.

Installato all'interno della base, se attivato, il riscaldatore aumenta la temperatura della base, permettendo di prevenire problemi legati alla formazione di ghiaccio, umidità o condensa.

Il riscaldamento in corso è segnalato dall'accensione del LED rosso di attivazione.

A	Riscaldatore EB0040H
B	Terminali
C	LED di attivazione
D	Fori di fissaggio
E	Base EB0040

Specifiche tecniche

Tensione di alimentazione	da 10 a 30 V $\pm$
Consumo	70 mA @ 27,6V $\pm$
Potenza	1,95 W @ 27,6V $\pm$
Resistenza	390 Ohm
Dimensioni	44,5 x 40 x 20 mm

Installazione

1. Predisporre la base EB0040 per il passaggio dei cavi.
2. Piazzare il riscaldatore nella base allineando i fori di fissaggio del riscaldatore con quelli nella base.
Fare attenzione che il lato della scheda con le viti dei terminali a vista sia rivolto verso il fondo della base.
3. Fissare il riscaldatore usando le viti fornite.
4. Alimentare la scheda collegando i cavi di alimentazione ai terminali "+" e "-" facendo attenzione alla polarità.

Dati del costruttore

Costruttore: Inim Electronics S.r.l.
Sito di produzione: Centobuchi, via Dei Lavoratori 10
63076 Montepandone (AP), Italy
Tel: +39 0735 705007
Fax: +39 0735 734912
e-mail: info@inim.it
Web: www.inim.it

Il personale autorizzato dal costruttore a riparare o sostituire qualunque parte del sistema, è autorizzato ad intervenire solo su dispositivi commercializzati con il marchio Inim Electronics.

Circa questo manuale

Codice del manuale: DCMIN4AEB0040H

Revisione: 110

Copyright: le informazioni contenute in questo documento sono proprietà esclusiva della Inim Electronics S.r.l.. Nessuna riproduzione o modifica è permessa senza previa autorizzazione della Inim Electronics S.r.l.. Tutti i diritti sono riservati.

RAEE



Ai sensi dell'art. 26 del Decreto Legislativo 14 marzo 2014, n. 49 "Attuazione della direttiva 2012/19/UE sui rifiuti di apparecchiature elettriche ed elettroniche (RAEE)"

Il simbolo del cassonetto barrato riportato sull'apparecchiatura o sulla sua confezione indica che il prodotto alla fine della propria vita utile deve essere raccolto separatamente dagli altri rifiuti. L'utente dovrà, pertanto, conferire l'apparecchiatura giunta a fine vita agli idonei centri comunali di raccolta differenziata dei rifiuti elettrotecnici ed elettronici. In alternativa alla gestione autonoma è possibile consegnare l'apparecchiatura che si desidera smaltire al rivenditore, al momento dell'acquisto di una nuova apparecchiatura di tipo equivalente. Presso i rivenditori di prodotti elettronici con superficie di vendita di almeno 400 m² è inoltre possibile consegnare gratuitamente, senza obbligo di acquisto, i prodotti elettronici da smaltire con dimensioni inferiori a 25 cm. L'adeguata raccolta differenziata per l'avvio successivo dell'apparecchiatura dismessa al riciclaggio, al trattamento e allo smaltimento ambientalmente compatibile contribuisce ad evitare possibili

effetti negativi sull'ambiente e sulla salute e favorisce il reimpiego e/o riciclo dei materiali di cui è composta l'apparecchiatura.

EN

Description

EB0040H heater is an accessory device for the EB0040 waterproof base of the Iris and Enea series detectors.
It must be installed inside the base and, if activated, it increases the temperature of the base; the activation prevents any problems related to the formation of ice, moisture or condensation.
The red LED on the board lights ON when the heating is in progress.

A	EB0040H heater
B	Terminal board
C	Activation LED
D	Anchor holes
E	EB0040 base

Technical specifications

Operating voltage	from 10 to 30 V ~
Current draw	70 mA @ 27.6V~
Power	1.95 W @ 27.6V~
Resistance	390 Ohm
Dimensions	44.5 x 40 x 20 mm

Installation

1. Set the EB0040 base for the wiring and the passage of the cables.
2. Place the heater aligning the anchor holes with the anchor holes inside the base.
Be careful the board is placed in the right way, with the terminal screws toward the bottom of the base.
3. Attach the board firmly by means of the screws provided.
4. Connect the power cables to the "+" and "-" terminals paying attention to the polarity.

Manufacturer's details

Manufacturer: Inim Electronics S.r.l.
Production plant: Centobuchi, via Dei Lavoratori 10 63076 Montepandone (AP), Italy
Tel: +39 0735 705007
Fax: +39 0735 734912
e-mail: info@inim.it
Web: www.inim.it

The persons authorized by the manufacturer to repair or replace the parts of this system, hold authorization to work on Inim Electronics brand devices only.

About this manual

Manual code: DCMIIN4AEB0040H
Revision: 110
Copyright: the information contained in this document is the sole property of Inim Electronics S.r.l. No part may be copied without written authorization from Inim Electronics S.r.l.. All rights reserved.

you can hand over the equipment you wish to dispose of to a dealer when purchasing new equipment of the same type. You are also entitled to convey for disposal small electronic-waste products with dimensions of less than 25cm to the premises of electronic retail outlets with sales areas of at least 400m2, free of charge and without any obligation to buy. Appropriate differentiated waste collection for the subsequent recycling of the discarded equipment, its treatment and its environmentally compatible disposal helps to avoid possible negative effects on the environment and on health and favours the re-use and/or recycling of the materials it is made of.

WEEE



Informative notice regarding the disposal of electrical and electronic equipment (applicable in countries with differentiated waste collection systems)

The crossed-out bin symbol on the equipment or on its packaging indicates that the product must be disposed of correctly at the end of its working life and should never be disposed of together with general household waste. The user, therefore, must take the equipment that has reached the end of its working life to the appropriate civic amenities site designated to the differentiated collection of electrical and electronic waste. As an alternative to the autonomous-management of electrical and electronic waste,



Evolving Protection
Inim Electronics S.r.l.

Centobuchi, via Dei Lavoratori 10
63076 Montepandone (AP), Italy
+39 0735 705007
+39 0735 734912
info@inim.it
www.inim.it

