REVISIONS					
REV	ZONE	MARK	DESCRIPTION	DATE	CHANGED

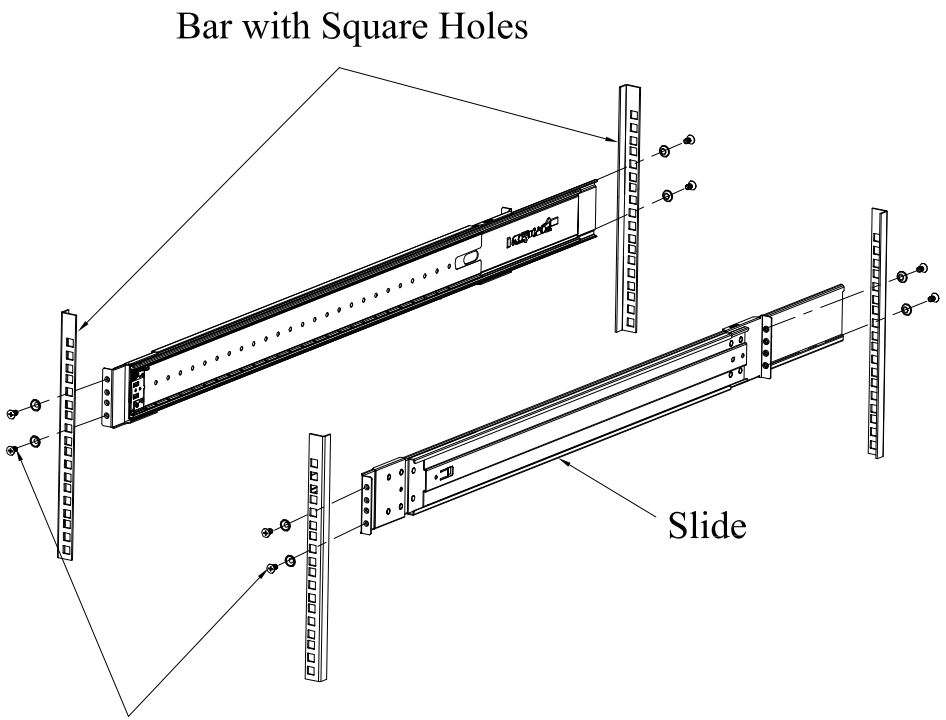

Use screws to attach the slide to the bars with square holes

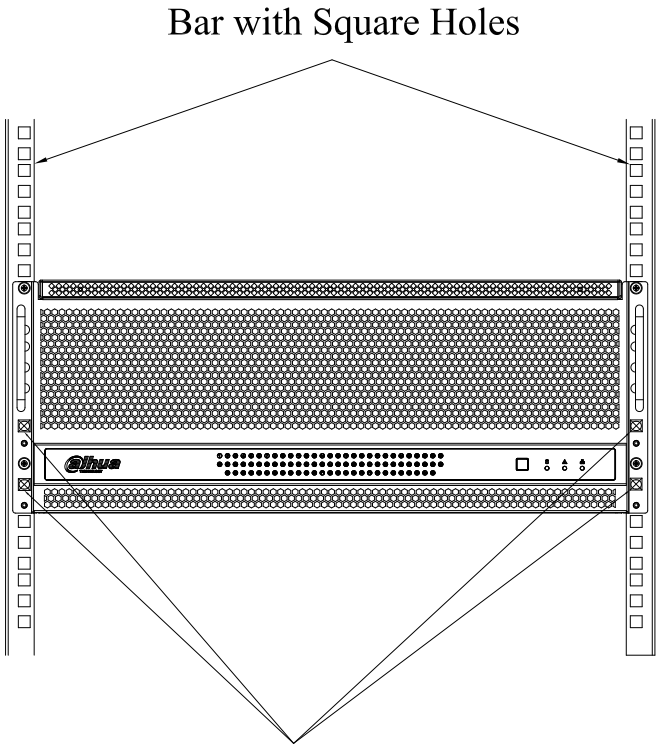

Attach the floating nuts to the bars with square holes, and then fix the device to the bars with screws

X	±0.2		TITLE: DHI-EVS7285S		
.XX	±0.10				
.XXX	±0.05	ANG ±0.5	DRAW:	DATE:	UNIT'S:mm DWG NO.:
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ZHEJIANG DAHUA TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF ZHEJIANG DAHUA TECHNOLOGY Co., LTD.			CHKD:	DATE:	SCALE:1:1
			STAD:	DATE:	PART NO.:
			APPD:	DATE:	SHEET:1 OF 1