

DH-IPC-PFW83242-A180-S2

4 × 8MP WizMind Multi-Sensor Panoramic Bullet Network Camera



Launched by Dahua Technology, Dahua WizMind is a full portfolio of solutions composed of project-oriented products including IPC, IVSS, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customer's requirements, WizMind provides precise, reliable and comprehensive AI solutions for verticals.

Series Overview

The splicing camera supports a 180° panoramic view and 4-channel hardware splicing to realize HD panoramic surveillance. The camera supports crowd situation analysis, vehicle situation analysis, and perimeter protection. It is widely applied in various scenes such as squares, airports, safe city, and traffic.

Functions

Panoramic Splicing

With advanced splicing algorithm, Dahua Panoramic Splicing technology deletes overlapped area and splices multiple images to be a complete panorama. The field of view of the spliced image can be up to 360°, which largely improves surveillance efficiency and user experience. Generally, after splicing, the field of view of four-sensor camera can be 180°, and the field of view of eight-sensor camera can be 360°.

Distortion Correction

With advanced distortion correction algorithm, Dahua Distortion Correction corrects the image distortion in both horizontal and vertical directions to be consistent with the actual situation.


AR Panorama

Dahua AR panorama technology generates wide-field of view through panoramic merging and splicing. The software overlaps the cameras as tags in the image. Click the tag to display the corresponding camera video, which makes monitoring visual and convenient, and improves command efficiency.

EPTZ

With advanced target detection and tracking algorithms, Dahua EPTZ technology can simultaneously zoom in and track multiple humans and vehicles that trigger alarms. It provides rich details and a panoramic view at the same time.

- 4 × 8MP, 1/1.8" CMOS image sensor, low illuminance, high image definition
- Outputs max. 32MP (8192 × 3840) @25/30 fps; with intelligent functions enabled, it can output 32MP (8192 × 3840) @20 fps
- Built-in IR LED, and the max. illumination distance is 30 m.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Intelligent functions: Crowd Distribution Map(Large-Scale AI Models), Vehicle Density, Perimeter Protection, EPTZ.
- Support image correction.
- Alarm: 2 in, 2 out; audio: 1 in, 1 out; 485; BNC; supports max. 256G SD card.
- 12 VDC/24 VAC/PoE power supply; easy for installation
- IP67 and IK10 protection
- AR panorama technology; various AR tags can be overlaid.

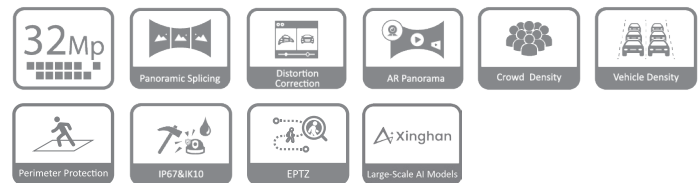

Crowd Density

Detects the number of people and the level of crowd density within an area. It adopts the Xinghan Large-Scale AI Model-Vision technology, enabling it to identify smaller pixels than standard devices and recognize people carrying umbrellas even in low-light conditions. This greatly improves the accuracy of crowd statistics at night and in rainy scenes.

Vehicle Density

With deep learning algorithm, Dahua Vehicle Density technology analyses the vehicle situation in the image, such as vehicle number in selected area. You can set threshold, and when the number is larger or smaller than the threshold, it triggers linkage.

Perimeter Protection

With deep learning algorithm, Dahua Perimeter Protection technology can recognize human and vehicle accurately. In restricted area (such as pedestrian area and vehicle area), the false alarms of intelligent detection based on target type (such as tripwire, intrusion) are largely reduced.

Cyber Security

Dahua network cameras employ a series of security technologies, including security authentication and authorization, access control protocols, trusted protection, encrypted transmission and encrypted storage. These technologies improve the camera's defense against external cyber threats and prevent malicious programs from compromising the device.

Xinghan Large-Scale AI Models-Vision

Xinghan Large-Scale AI Models-Vision seamlessly expands the storage and operational capacity of algorithmic models through the powerful integration of edge AI model algorithms and NPU computing power. Engineered with a lightweight transformer architecture and enhanced by model distillation and quantization techniques, it optimizes the computing power consumption of ViT operators. This enables the system to collaborate on multiple tasks simultaneously through joint inference between small and large models optimized for edge devices.

Technical Specification				
Camera				
Image Sensor	1/1.8" CMOS			
Max. Resolution	8192 (H) × 3840 (V)			
ROM	8 GB			
RAM	4 GB			
Scanning System	Progressive			
Electronic Shutter Speed	Auto/Manual 1/3 s–1/100,000 s			
Min. Illumination	0.005 lux@F1.6 (Color,30 IRE) 0.0005 lux@F1.6 (B/W,30 IRE) 0 Lux (Illuminator on)			
S/N Ratio	>56 dB			
Illumination Distance	30 m (98.43 ft) (IR LED)			
Illuminator On/Off Control	Auto; Manual			
Illuminator Number	8 (IR LED)			
Pan/Tilt/Rotation Range	Pan: 0°–355° Tilt: 0°–90° Rotation:0°–360°			
Lens				
Lens Type	Fixed-focal			
Lens Mount	M16			
Focal Length	2.8 mm			
Max. Aperture	F1.6			
Field of View	H: 180°; V: 100°			
Iris Control	Fixed			
Close Focus Distance	1.8 m (5.90 ft)			
DORI Distance	Detect	Observe	Recognize	Identify
	84.0 m (275.59 ft)	33.6 m (110.24 ft)	16.8 m (55.12 ft)	8.4 m (27.56 ft)
Intelligence				
EPTZ	Yes			
IVS (Perimeter Protection)	Tripwire; intrusion; parking detection			
Vehicle Density	Vehicle density; parking upper limit; vehicle congestion alarm			
Crowd Distribution Map	Crowd map(Large-Scale AI Models), global people counting; people counting in area			

Smart Search	Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos.
Video	
Video Compression	H.265; H.264; H.264H; H.264B; MJPEG (only supported by the sub stream)
Smart Codec	Smart H.265+; Smart H.264+
Video Frame Rate	Prioritize videos: Main stream: 8192 × 3840@(1–25/30 fps) Sub stream: 1280 × 600@(1–25/30 fps) Third stream: 2304 × 1080@(1–25/30 fps) Prioritize intelligence: Main stream: 8192 × 3840@(1–20 fps) Sub stream: 1280 × 600@(1–20 fps) Third stream: 2304 × 1080@(1–20 fps) *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.
Stream Capability	3 streams
Resolution	8192 × 3840; 7680 × 3600; 7168 × 3360; 6720 × 3152; 5760 × 2700; 4800 × 2252; 4096 × 1920; 2880 × 1360; 2304 × 1080; 2048× 960; 1520 × 712; 1280 × 600;8192 × 3840; 7680 × 3600; 7168 × 3360; 6720 × 3152; 5760 × 2700; 4800 × 2252; 4096 × 1920; 2880 × 1360; 2304 × 1080; 2048 × 960; 1520 × 712; 1280 × 600
Bit Rate Control	CBR/VBR
Video Bit Rate	H.264: 96kbps–32768 kbps; H.265: 38kbps–32768 kbps
Day/Night	Auto(ICR)/Color/B/W
BLC	Yes
HLC	Yes
WDR	DWDR
White Balance	Auto;natural;street lamp;outdoor;manual;regional custom;Auto; natural; street lamp; outdoor; manual; custom area
Gain Control	Auto; Manual
Noise Reduction	3D NR
Motion Detection	OFF/ON (4 areas, rectangular)
Region of Interest (Rol)	Yes (4 areas)
Privacy Masking	4 areas
Audio	
Audio Compression	G.711a; G.711Mu; G.726: G.723; PCM
Alarm	
Alarm Event	No SD card; SD card full; SD card error; SD card durability warning; network disconnection; IP conflict; illegal access; motion detection; video tampering; scene changing; audio detection; voltage detection; external alarm; security exception; crowd distribution map; tripwire; intrusion; parking detection; intensity change; traffic congestion; parking upper limit
Network	
Network Port	RJ-45 (10/100/1000 Base-T)
SDK and API	Yes

Network Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; SNMP
Interoperability	ONVIF (Profile S/Profile G/Profile T); CGI
User/Host	20
Storage	FTP; SFTP; Micro SD card (support max. 256 GB); NAS
Browser	IE: IE 9 and later Chrome: Chrome 86 and later Firefox: Firefox 86 and later
Management Software	DSS
Cyber Security	Configuration encryption; trusted execution; Digest; security logs; WSSE; account lockout; syslog; video encryption; 802.1x; IP/MAC filtering; HTTPS; trusted upgrade; trusted boot; firmware encryption; generation and importing of X.509 certification

Certification

Certifications	CE-LVD: EN62368-1; CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU; FCC: 47 CFR FCC Part 15; Subpart B; UL/CUL: UL62368-1 & CAN/CSA C22.2 No. 62368-1-14
----------------	--

Port

RS-485	1 (baud rate range: 1200 bps–115200 bps)
Audio Input	1 channel (RCA port)
Audio Output	1 channel (RCA port)
Alarm Input	2 channels in: 5mA 3V–5 VDC
Alarm Output	2 channels out: 1,000mA 30 VDC/500 mA 50 VAC

Power

Power Supply	12 VDC/24 VAC/PoE+(802.3at)
Power Consumption	Basic power consumption: 10.6 W (12 VDC); 11.9 W (24 VAC); 11.9 W (PoE) Max. power consumption (Intelligence on +IR intensity + WDR): 22.2 W (12 VDC); 25 W (24 VAC); 25 W (PoE)

Environment

Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Operating Humidity	≤95%
Storage Temperature	–40 °C to +60 °C (–40°F to +140°F)
Storage Humidity	≤95%
Protection	IK10; IP67

Structure

Casing Material	Metal + plastic
Product Dimensions	298.3 mm × 172.5 mm × 120.5 mm (11.74" × 6.79" × 4.74") (L × W × H)
Net Weight	3.16 kg (6.97 lb)
Gross Weight	4.06 kg (8.95 lb)

Ordering Information

Type	Model	Description
32MP Camera	DH-IPC-PFW83242-A180-S2	4 × 8MP WizMind Multi-Sensor Panoramic Bullet Network Camera
	IPC-PFW83242-A180-S2	4 × 8MP WizMind Multi-Sensor Panoramic Bullet Network Camera
Accessories (Optional)	PFA120-SG	Junction Box
	PFA150-SG	Pole Mount Bracket
	PFM320D	12 VDC 2 A Power Adapter
	PFM900-E	Integrated Mount Tester
	TF-P100	MicroSD Memory Card

Accessories

Optional:



PFA120-SG
Junction Box



PFA150-SG
Pole Mount
Bracket




PFM320D
12 VDC 2 A
Power Adapter



PFM900-E
Integrated
Mount Tester



TF-P100
MicroSD
Memory Card

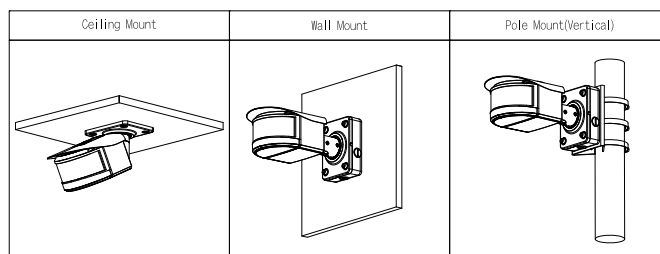

Dimensions (mm[inch])

