
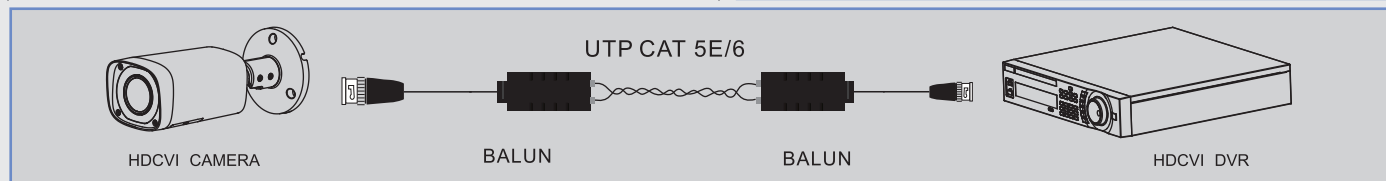


Item		Specification
Properties	Transmission Signal	1 Channel
	Transmission Distance	720P:400M(max) 1080P: 250M (max)
	Category Type	UTP CAT 5E/6 (R < 10Ω/100M)
Video Transmission Properties and Port	Coaxial Video Connector	BNC-M
	Twisted-pair Video Connector	Push-terminal
	Compatible Format	HDCVI
	Resolution	720P/1080P
	Anti-interference	>60db
Protection	ESD	1a contact discharge electricity level 3
		1b air discharge electricity level 3
	Coaxial Cable Connector	Per: IEC61000-4-2
		2KV(common-code) Per: IEC1000-4-5
Impedance	UTP Cable Connector	2KV(different-code),4KV (common-code), Per: IEC1000-4-5
	BNC Male	75 ohms
	UTP Cable	100 ohms

Item		Specification
Physical Properties	Dimension (L*W*H)	35*19*16 mm
	Shell	ABS
	Color	Black
	N. W.	21g
Stability	MTBF	>10000H
Environmental	Operating Temperature	-10-55°C
	Storage Temperature	-20-70°C
	Humidity	0-95% (non-condensing)

To Coaxial Cable

To UTP Cable

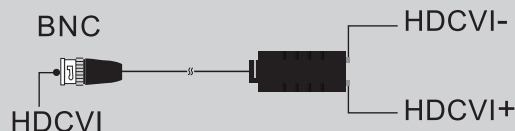

Warning

Do not connect the power supply to avoid the passive transmitter being burnt!

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.