

DH-PSDW8842S-A180-D425

8 MP Multi-Sensor 180° Panoramic PTZ Mini Hubble Wizmind Network Camera



WizMind

Launched by Dahua Technology, Dahua WizMind is a full portfolio of solutions composed of project-oriented products including IPC, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customer's requirements, WizMind provides precise, reliable and comprehensive AI solutions for verticals.

System Overview

Mini Hubble Panoramic Network Camera brings together the power of the bullet camera and PTZ camera into one powerful design. This all-in-one camera harnesses the expanse of its panoramic view to track targets and detect details in the monitored scene. The bullet camera combines 4 sensors that work in tandem to realize 180° panoramic surveillance. It has a large aperture lens that leverages flowing light technology to detect targets even in poor lighting, and supports image correction and editing video recordings on the platform. The PTZ camera cooperates with the bullet camera to perform smart tracking and quickly detect details in the monitored scene. Advanced algorithms are integrated into the functions of the Bullet camera and PTZ camera, allowing them to perform detection and trigger a variety of alarms such as tripwire, intrusion, face detection and video metadata. The PTZ camera can also be set to automatically or manually track targets, allowing the all-in-one camera to meet the security needs of complex scenes.

Functions

Panoramic Splicing

With advanced splicing algorithm, Dahua Panoramic Splicing technology deletes overlapped area and splices multiple images to be a complete panorama. The field of view of the spliced image can be up to 180°, which largely improves surveillance efficiency and user experience. Generally, after splicing, the field of view of eight-sensor camera can be 360°.

- Panoramic parameters: 4 × 2 MP 1/1.8" CMOS image sensors.
- PTZ parameters: 1 × 4 MP 1/1.8" CMOS image sensors.
- PTZ camera: 25× optical zoom, 16× digital zoom.
- H.265 codec, high compression rate, ultra-low bit rate.
- WDR, 3D NR, HLC, BLC, applicable to various monitoring scenes.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Smart tracking.
- Built-in dual MIC, built-in speaker, support two-way talk.
- Intelligent Functions: Panoramic Network Camera: Perimeter Protection, Vehicle Density, Crowd Distribution Map; PTZ Camera: Perimeter Protection, Face Detection and Video Metadata.



Smart Tracking

With advanced algorithm, Dahua network camera can detect targets, track targets with speed dome, and view details.

Distortion Correction

With advanced distortion correction algorithm, Dahua Distortion Correction corrects the image distortion in both horizontal and vertical directions to be consistent with the actual situation.

Face Detection

Dahua Face Detection technology can detect the face in the image. With deep learning algorithm, the technology supports detecting, tracking, capturing and selecting the best face image, and then outputs face snapshot.

Video Metadata

With deep learning algorithm, Dahua Video Metadata technology can detect, track, capture vehicle, non-motor vehicle and people, and select the best images, and extract attributes.

AR Panorama

Dahua AR panorama technology generates wide-field of view through panoramic merging and splicing. The software overlaps the cameras as tags in the image. Click the tag to display the corresponding camera video, which makes monitoring visual and convenient, and improves command efficiency.

Technical Specification

Camera

Image Sensor	Panoramic network camera: 1/1.8"CMOS PTZ camera: 1/1.8"CMOS
Max. Resolution	Panoramic network camera: 4096 × 1800 PTZ camera: 2560 × 1440
ROM	Panoramic network camera: 4 GB PTZ camera: 4 GB
RAM	Panoramic network camera: 4 GB PTZ camera: 1 GB
Scanning System	Progressive
Electronic Shutter Speed	Panoramic network camera: Auto/Manual 1/3 s-1/100,000 s PTZ Camera: Auto/Manual 1/1 s-1/300,000 s
Min. Illumination	Panoramic network camera:0.001 lux @F1.0(Color, 30 IRE); 0.0001 lux@F1.0(B/W, 30 IRE) PTZ camera:0.001 lux @F1.6(Color, 30 IRE); 0.0001 lux @ F1.6(B/W, 30 IRE); 0 lux (Illumination on)
S/N Ratio	Panoramic network camera: >56 dB PTZ camera: >56 dB
Illumination Distance	Panoramic network camera: NA PTZ camera: up to 100 m (328.08 ft) (IR on)
Illuminator On/Off Control	Auto; Zoomprio; Manual
Illuminator Number	Panoramic network camera: NA PTZ camera: 4(IR LED)
Gradienter	The horizontal gradient is visualized, simplifying installation.

Lens

Lens Type	Panoramic network camera: Fixed-focal PTZ camera: Motorized vari-focal				
Lens Mount	Panoramic network camera: M16 PTZ camera: Module				
Focal Length	Panoramic network camera: 2.8 mm PTZ camera: 5.3 mm–134 mm, optical zoom (25 times)				
Max. Aperture	Panoramic network camera: F1.0 PTZ camera: F1.6–F4.0				
Field of View	Panoramic network camera: H: 180°; V: 103° PTZ camera: H: 3.5°–58°; V: 2°–35°; D: 2°–64°				
Iris Control	Panoramic network camera: Fixed PTZ camera: Auto				
Close Focus Distance	Panoramic network camera:1.4 m (4.59 ft) PTZ camera: 0.5 m–7 m (1.64 ft–22.96 ft)				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	Panoramic network camera	57.9 m (189.96 ft)	23.2 m (76.11 ft)	11.6 m (38.05 ft)	5.8 m (19.02 ft)
	PTZ camera	1688 m (5538.05 ft)	675 m (2214.56 ft)	337 m (1105.64 ft)	168 m (551.18 ft)
	*DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/ project design tool.				

Intelligence

Intelligence Description	Panoramic network camera: Perimeter protection, crowd distribution map, vehicle density PTZ camera: Perimeter protection, video metadata, face detection
--------------------------	---

IVS (Perimeter Protection)

Panoramic network camera: Tripwire; intrusion; parking detection
PTZ camera:Tripwire, intrusion, fast moving (the three functions support the classification and accurate detection of vehicle and human); parking detection, loitering detection, and people gathering.

Face Detection

PTZ camera: Face detection; track; snapshot; snapshot optimization; optimal face snapshot upload; face enhancement; face exposure; face attributes extraction including 6 attributes (gender, age, glasses, expressions, mask, and beard) and 8 expressions (angry, sad, disgusted, scared, surprised, calm, happy, confused); face snapshot set as face or one-inch photo; snapshot strategies (real-time snapshot, quality priority and optimization snapshot); face angle filter; optimization time setting.

Video Metadata

PTZ camera: Motor vehicle, non-motor vehicle, face, human body detection; track; snapshot; snapshot optimization; optimal face snapshot upload.
Motor vehicle attributes: license plate, vehicle type, vehicle color, vehicle logo, seatbelt, smoking, calling,etc.
Non-motor vehicle attributes: type, color, number of people, top type and color ,helmet.
Human body attributes: gender, top/bottom type and color, bag, hat, gender, and umbrella.
Face attributes: gender, age, expressions, glasses, face mask and beard.

Vehicle Density

Panoramic network camera: Vehicle density; parking upper limit

Crowd Distribution Map

Panoramic network camera: Crowd distribution map; global crowd density; crowd density in area; people counting in area

Smart Search

Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos.

Video

Video Compression

H.265; H.264; H.264H; MJPEG (Only supported by the sub stream)

Smart Codec

Smart H.265+; Smart H.264+

Video Frame Rate

Panoramic network camera:
Main stream: 4096 × 1800@(1-25/30fps)
Sub stream: 1024 × 452@(1-25/30fps)
Third stream: 1920 × 832@(1-25/30fps)
PTZ camera:
Main stream: 2688 × 1520@(1-25/30fps)
Sub stream: 704 × 480@(1-25/30fps)
Third stream: 1920 × 1080@(1-25/30fps)

Stream Capability

3 streams

Resolution

Panoramic network camera:
Main stream: 4096 × 1800; 3840 × 1680; 2880 × 1264; 2048 × 900
Sub Stream: 1024 × 452
Third Stream: 1920 × 832; 1280 × 560
PTZ camera:
Main stream: 2560 × 1440; 1920 × 1080; 1280 × 960; 1280 × 720
Sub Stream: 704 × 576; 352 × 288
Third Stream: 1920 × 1080; 1280 × 960; 1280 × 720

Bit Rate Control

CBR/VBR

Video Bit Rate

Panoramic network camera:
H.264: 3328 kbps–16640 kbps
H.265: 1280 kbps–9984 kbps
PTZ camera:
H.264: 2816 kbps – 13056 kbps
H.265: 1024 kbps –7936 kbps

Day/Night

Auto (ICR)/Color/B/W

BLC

Yes

HLC	Yes
WDR	Panoramic network camera: WDR (120 dB) PTZ camera: WDR (120 dB)
White Balance	Panoramic network camera: Auto; natural; street lamp; outdoor; manual; regional custom PTZ camera: Auto; indoor; outdoor; tracking; manual; sodium lamp; natural; street lamp
Gain Control	Auto; Manual
Noise Reduction	3D NR
Motion Detection	OFF/ON (4 areas, rectangular)
Region of Interest (RoI)	Yes (4 areas)
Image Stabilization	Panoramic network camera: NA PTZ camera: Electronic Image Stabilization (EIS)
Smart Illumination	Panoramic network camera: NA PTZ camera: Yes
Defog	Panoramic network camera: NA PTZ camera: Yes
Image Rotation	0°/180° (PTZ camera)
Privacy Masking	Panoramic network camera: 4 areas PTZ camera: 8 areas
LDC	Panoramic network camera: Yes PTZ camera: No

Audio

Built-in MIC	Yes, built-in dual Mic
Built-in Speaker	Yes, built-in speaker
Audio Compression	PCM; G.711a; G.711Mu; G.726; G.723

Alarm

Alarm Event	No SD card; SD card full; SD card error; network disconnection; IP conflict; illegal access; motion detection; video tampering; tripwire; intrusion; parking detection; scene changing; audio detection; voltage detection; external alarm; video metadata; security exception
-------------	--

Network

Network Port	RJ-45(10/100/1000 Base-T)
SDK and API	Yes
Network Protocol	IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; SAMBA; PPPoE; SNMP
Security	Trusted execution; Digest; Security logs; WSSE; Account lockout; Syslog; 802.1x; IP/MAC filtering; HTTPS; Trusted upgrade; Trusted boot; Generation and importing of X.509 certification
Interoperability	ONVIF (Profile S/Profile G/Profile T); CGI; Milestone
User/Host	14 (Total bandwidth: 176 M)
Storage	Micro SD card (support max. 512GB); FTP; SFTP; NFS; SMB
Browser	IE: IE11 Chrome Firefox
Management Software	DSS

Certification

Certifications	CE-LVD:EN62368-1 CE-EMC:Electromagnetic Compatibility Directive 2014/30/EU FCC:47 CFR FCC Part 15, Subpart B UL/CUL:UL62368-1 & CAN/CSA C22.2 No. 62368-1-14
----------------	---

PTZ Dome

Pan/Tilt Range	Pan: 0° to 360° endless Tilt: -10° to 90°, auto flip 180°
Manual Control Speed	Pan: 0.1°/s-120°/s Tilt: 0.1°/s-50°/s
Positioning Accuracy	Pan: 0.1° Tilt: 0.1°
Remote PTZ Reset	Yes
Preset	300
Tour	8 Tour (up to 32 preset per tour)
Pattern	5
Scan	5
Power-off Memory	Yes
Idle Motion	Preset/Pattern/Tour/Scan
Time Task	Yes
Three-dimensional Positioning	Yes
PTZ Limit	Yes
Position Display	Yes
Information Display	Yes
Time Display	Yes

Port

Audio Input	2 channels (terminal)
Audio Output	1 channel (terminal)
Alarm Input	3 channels in: 5 mA 3-5 VDC
Alarm Output	2 channels out: 1,000 mA 30 VDC/500 mA 50 VAC
Analog Output	1 channel (CVBS output: BNC)

Power

Power Supply	36 VDC
Power Consumption	Basic: 35 W (36 VDC) Max. (Basic power consumption + WDR + intelligence on + IR on + PTZ operation): 45 W (36 VDC)


Environment

Operating Temperature	-40 °C – +60 °C (-104 °F to +140 °F)
Operating Humidity	≤95%
Storage Temperature	-40°C to +70°C (-104°F to +158°F)
Protection	IP67

Structure


Casing Material	Metal + plastic
-----------------	-----------------

Product Dimensions	326 mm × Φ280 mm (12.83" × Φ11.02")
Packaging Dimensions	394 mm × 352 mm × 468 mm (15.51" × 13.86" × 18.43")
Net Weight	7 kg (15.43 lb)
Gross Weight	10.4 kg (22.93 lb)

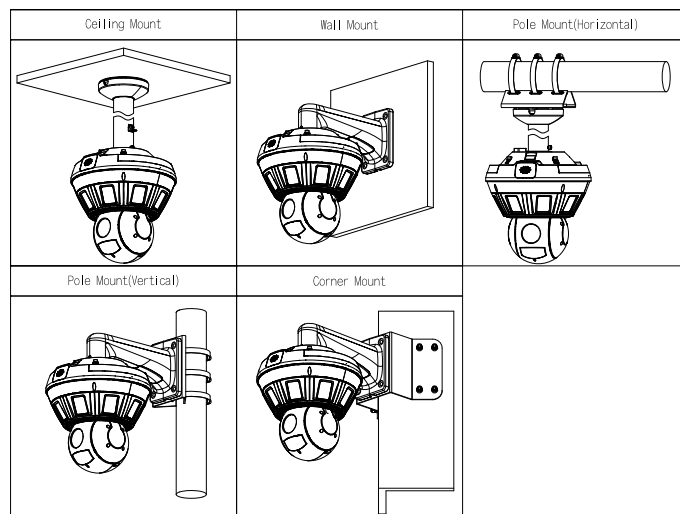

Ordering Information		
Type	Model	Description
Panoramic + PTZ camera	DH-PSDW8842S-A180-D425	8 MP Multi-Sensor 180° Panoramic PTZ Mini Hubble Wizmind Network Camera
	PSDW8842S-A180-D425	8 MP Multi-Sensor 180° Panoramic PTZ Mini Hubble Wizmind Network Camera
Accessories	36 VDC 5A Power Adapter	36 VDC 5A Power Adapter
	PFB303W-SG	Wall Mount Bracket
	PFB300C-S	Ceiling Mount Bracket
	PFA150-SG	Pole Mount Bracket
	PFA151	Corner Mount Bracket
	TF-P100	MicroSD Memory Card

Dimensions (mm[inch])

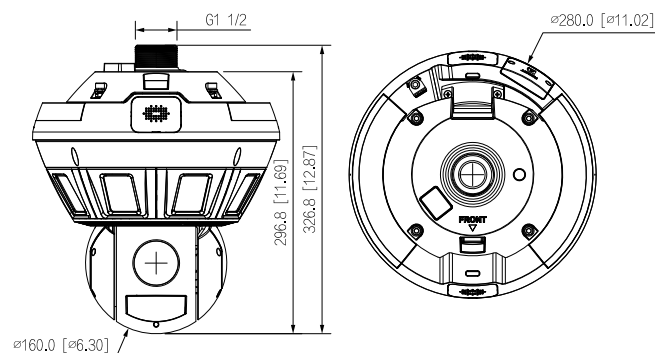

Accessories

Included:



36 VDC 5A
Power Adapter

Optional:



PFB303W-SG
Wall Mount
Bracket



PFB300C-S
Ceiling Mount
Bracket



PFA150-SG
Pole Mount
Bracket



PFA151
Corner Mount
Bracket



TF-P100
MicroSD
Memory Card