

ZAEX02

ZAEX02_Explosion-proof Stuffing Box



- Stainless steel 316L
- Outlet hole specification: M25 × 1.5-G3/4
- Explosion-proof mark: II 2 G Ex db IIC Gb, II 2 D Ex tb IIIC Db; Ex db IIC Gb, Ex tb IIIC Db
- IP68 rated



Scene

The explosion-proof camera is for explosion-proof industrial monitoring. It is mainly used in dangerous environments with explosive gas and dust in the petrochemical industry, such as oil fields, drilling platforms, oil pipelines, oil refineries, chemical plants, explosives warehouses.

Technical Specification


Certification	
Certifications	ATEX: II 2 G Ex db IIC Gb, II 2 D Ex tb IIIC Db IECEx: Ex db IIC Gb, Ex tb IIIC Db
Environment	
Operating Temperature	−45°C to +100°C (−49°F to 212°F)
Operating Humidity	≤ 95%
Protection	IP68
Anti-corrosion Level	Basic Protection *The products are designed for general use and are applicable even in areas with no specific requirements for anti-corrosion protection.

Structure	
Casing	SUS316L
Product Dimensions	74 mm × Φ52.67 mm (2.91" × Φ2.07")
Net Weight	0.3 kg (0.66 lb)
Gross Weight	0.4 kg (0.88 lb)

Ordering Information

Type	Model	Description
Explosion-proof Stuffing Box	ZAEX02_Explosion-proof Stuffing Box	ZAEX02_Explosion-proof Stuffing Box

Dimensions (mm[inch])

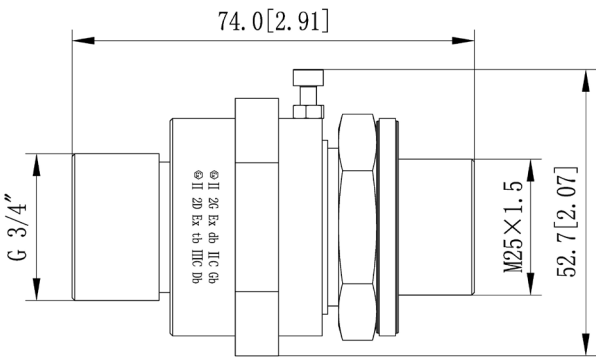

Application

